


Technical Data

Max. output	Manual product feeding by operator
Power Connection	
Rated coltage	L1/N/PE 230 V / 115 V
Rated frequency	50 / 60 Hz
Power capacity	ca. 0.8 – 1.0 kVA
Protection class	Standard protection class IP54
Stainless steel	V2A AISI 304
Working height	700-850 800-950 900-1.050 mm ¹⁾
Processable package dimensions (L x W x H)	Min. 10 x 40 x 10 – max. 600 x 300 x 400 mm ²⁾
Processable codes	1D-Barcodes, 2D-Codes, QR-Codes
Code verification requirements	Minimal structure volume • Code 128: 0.25 mm (10 Mil) • Datamatrix: 0.25 mm (10 Mil)
Weight	Approx. 160 kg

¹⁾ Other working height on request

²⁾ Other package dimensions on request

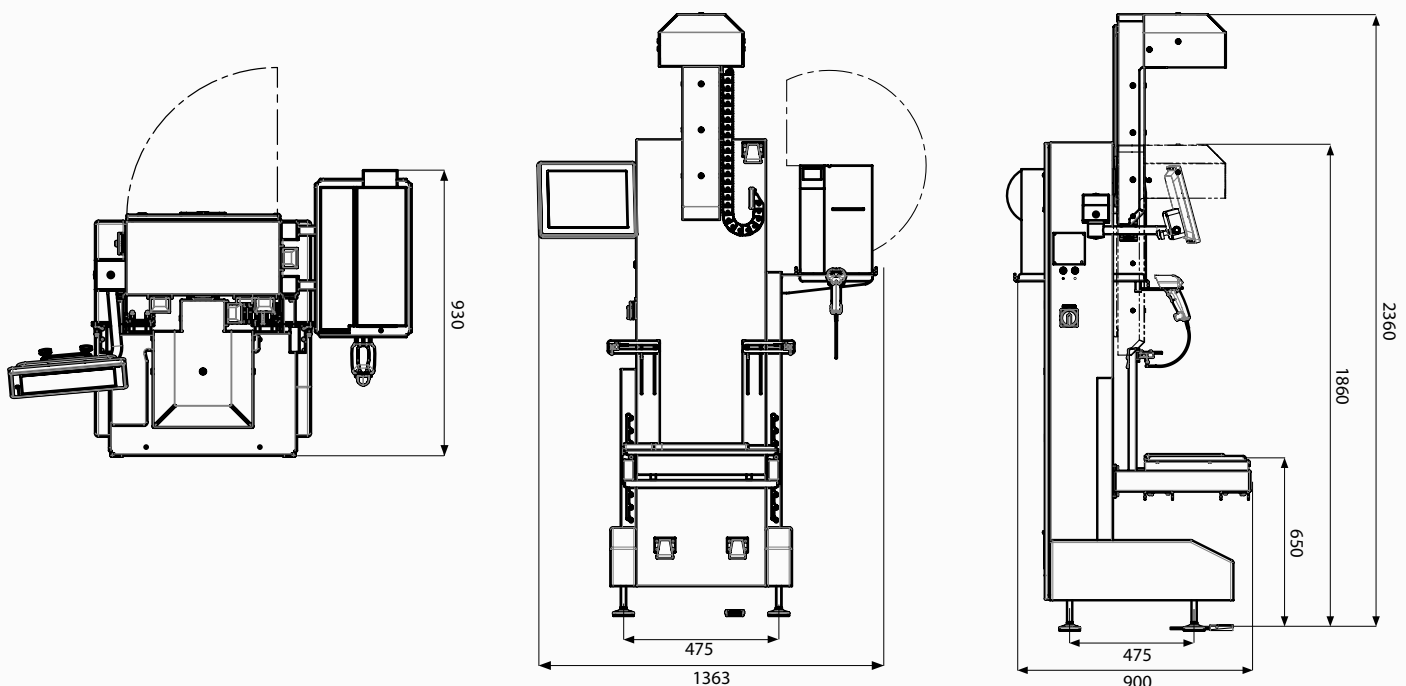

OCS Checkweighers GmbH
 Adam-Hoffmann-Straße 26
 67657 Kaiserslautern
 Germany
 T +49.341-46-0
 F +49.341.46-8690
 info@ocs-cw.com
 www.ocs-cw.com



CHECKWEIGHERS

A Wipotec Brand