
MEDICAL SCALES 2015



Personal scale KERN MPC

Professional personal scale – approved as a medical device and with EC type approval class III for professional use in medical diagnostics



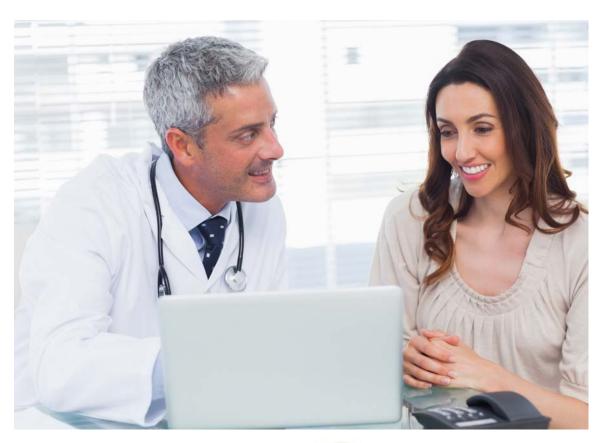

Your KERN specialist dealer



APPROVED MEDICAL DEVICE







Features

- Verification class III (verification is optional)
- · Approved as a medical device according to 93/42/EEC
- II The bestseller for doctor's surgeries, chemists and hospitals
- · Robust design for daily use in a professional environment
- · Ergonomically optimised design
- For easy and hygienic cleaning
- Secure and non-slip positioning with height-adjustable rubber feet. Level indicator to level the balance precisely
- 2 Flexible positioning of display device, e.g. free-standing or mounted to the wall. Wall mount for display device standard
- ullet B Large platform with non-slip and wear-resistant surface made of plastic, to provide a secure footing for patients
- · High resolution readout: Readout [d] for 5 sec. increased by one decimal place at the touch of a key
- BMI function to determine normal weight/surplus weight
- · Vibration-free weighing: Vibrations are filtered out so that a stable weight is obtained, ideal for restless patients

- · Data hold function: When the weighing value remains unchanged the weight indicated on the display is automatically "frozen" for 10 sec. until the HOLD key is pressed. This leaves suffcient time to read the weight in peace
- · Mother and child function: the mother's weight will be taken and then the scale will be reset to zero at the push of a button. Then the mother and baby can be weighed together. The weight of the child will now be shown on the display. This is particularly good for infants, as this way they can be cradled, safe and sound, in the arms of their mother while being weighed

Technical data

- · Backlit LCD display, digit height 25 mm
- · Dimensions of weighing plate WxDxH 365x360x80 mm
- Dimensions of display device WxDxH 200x128x55 mm
- · Cable length of display device approx. 150 cm
- · Battery operation possible, 6 x 1,5V AA, not included, operating time up to 20 h
- · Mains adapter (external) included
- · Net weight approx. 10 kg

Accessories

- · Protective working cover over the display device, standard, can be reordered, KERN MBC-A06
- · Cleaning cloths, alcohol-free cloths for wipe disinfectant. Fulfil the legal requirements for occupational safety in accordance with TRGS 525/540. Packaging contents 80 pcs., size 20x22 cm per cloth, KERN MYC-01
- Rechargable battery pack internal, operating time up to 40 h without backlight, charging time approx. 12 h, KERN MBC-A08
- · RS-232 data interface, must be ordered at purchase, KERN MPC-A01
- Thermal printer for printing weights, 112 mm wide paper strips, housing dimensions WxDxH 165x140x50 mm, mains adapter 230V/50Hz as standard KERN YKB-01N
- · Interface cable RS-232C to connect an external device, KERN CFS-A01

STANDARD















Within the EU, official verification is mandatory by law for scales that are intended for use as a medical device. Please add this to your order. We require the location of use and the post code for the verification

Model	Weighing range	Readout	Verification value	Mandatory by law Verification		Option DAkkS Calibr. Certificate	
	[Max]	[d]	[e]	MIII		DAkkS	
KERN	kg	kg	kg	KERN		KERN	
MPC 250K100M	250	0,1	0,1	965-129		963-129	

Pictograms



Data interface RS-232:

To connect the balance to a printer, PC or network.



Vibration-free weighing:

When the weighing conditions are unstable, a stable weight is calculated as an average value



Battery operation:

Ready for battery operation. The battery type is specified for each device.



Rechargeable battery pack:

Rechargeable set.



Mains adapter:

230V/50Hz in standard version for EU. On



request GB, AUS or USA version available.



Verification possible:

The time required for verification is specified in the pictogram.



DAkkS calibration possible:

The time required for DAkkS calibration is shown in days in the pictogram.



Package shipment:

The time required for internal shipping preparations is shown in days in the pictogram.



The warranty period is shown in the pictogram.